


# Waste compactors

## C-series



OEG's patented **ENVIROPAK** C-series compactors are designed to function as both a compactor and a baler, featuring a hydraulic operated roll back top for easy loading and unloading. The C-series compactors compact all types of non-hazardous waste into the compactor bag. All compactors meet and exceed international MARPOL 73/78 Annex V and use UL listed components.

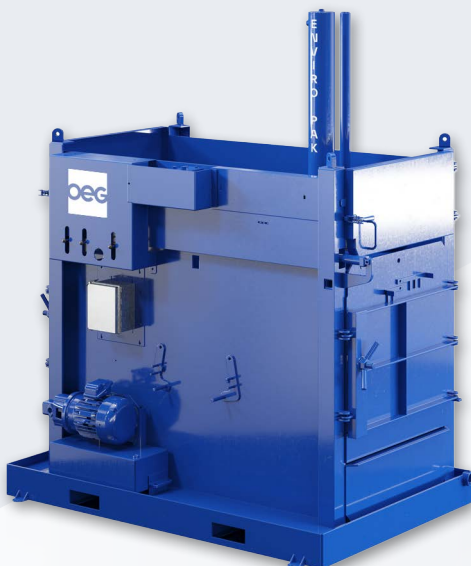

### Can't find what you are looking for?

Contact our global sales team at [sales.enviropak@oeg.group](mailto:sales.enviropak@oeg.group) or visit our website to find your regional representative at [oeg.group](http://oeg.group)

## Key features

Reduce disposal costs by reducing waste volume

Moving parts completely enclosed and two-hand operation for operator safety

In-bag compaction at a 5:1 safety ratio

Slow-release door for easy bag removal

UV light for sanitation

## Optional features

Filter, can/glass crusher, and food grinder attachments available

IP56 upgrade

IECEx / ATEX component build available

Please check exact specifications with your local representative when ordering.

Imperial | International/US standard

Unit model	Model 3000C	Model 4000C	Model 5000C
Capacity	30 ft <sup>3</sup>	40 ft <sup>3</sup>	50 ft <sup>3</sup>
Dimensions (HxWxD - in)	107 x 56 x 83"	107 x 62 x 92"	114 x 62 x 95"
Deck Space	32 ft <sup>2</sup>	38 ft <sup>2</sup>	38 ft <sup>2</sup>
Weight	3,900 lbs	4,115 lbs	4,360 lbs
Compaction Force	60,000 lbs	60,000 lbs	60,000 lbs

# Waste compactors

## C-series

Imperial | International/US standard

Unit model	Model 3000C	Model 4000C	Model 5000C
Bag Model	HV96026	HV96030	HV96027
Bag SWL	1,500 lbs	2,200 lbs	2,200 lbs
Electrical Rating	5HP 230/460V 15.5/7.8 AMP	5HP 230/460V 15.5/7.8 AMP	5HP 230/460V 15.5/7.8 AMP
Air Requirement	100PSI / 175CFM	100PSI / 175CFM	100PSI / 175CFM
Cycle Time	96 seconds	96 seconds	96 seconds
Oil Capacity	10 gal	10 gal	10 gal

Metric | International standard

Unit model	Model 3000C	Model 4000C	Model 5000C
Capacity	0.9 m³	1.1 m³	1.42 m³
Dimensions (HxWxD - mm)	2,718 x 1,422 x 2,108 mm	2,718 x 1,575 x 2,336 mm	2,896 x 1,575 x 2,413 mm
Deck Space	3.0 m²	3.5 m²	3.5 m²
Weight	1,772 kg	1,867 kg	1,982 kg
Compaction Force	27,216 kg	27,216 kg	27,216 kg
Bag Model	HV96026	HV96030	HV96027
Bag SWL	680 kg	997 kg	997 kg
Electrical Rating	5HP 230/460V 15.5/7.8 AMP	5HP 230/460V 15.5/7.8 AMP	5HP 230/460V 15.5/7.8 AMP
Air Requirement	100PSI / 175CFM	100PSI / 175CFM	100PSI / 175CFM
Cycle Time	96 seconds	96 seconds	96 seconds
Oil Capacity	38 L	38 L	38 L

### Can't find what you are looking for?

Contact our global sales team at [sales.enviropak@oeg.group](mailto:sales.enviropak@oeg.group) or visit our website to find your regional representative at [oeg.group](https://www.oeg.group)

E & OE – All dimensions and weights are accurate at the time of creation. Please check exact specifications of units with your local representative when ordering.

